


XPedite6100

NXP QorIQ T1042 Quad-Core Processor-Based, Air-Cooled XMC/PrPMC with Four Gigabit Ethernet Ports

- ▶ NXP QorIQ T1042 processor with four Power Architecture® e5500 cores at up to 1.4 GHz
- ▶ Alternate NXP QorIQ processors: T1022 and T2081
- ▶ Air-cooled
- ▶ Up to 8 GB of up to DDR3-1600 ECC SDRAM
- ▶ Up to 512 MB of NOR flash (with redundancy)
- ▶ Up to 32 GB of NAND flash
- ▶ x4 PCI Express interface to P15 Gen2 (T10xx) or Gen3 (T2081)
- ▶ PCI PrPMC interface
- ▶ Four Gigabit Ethernet ports
- ▶ Two RS-232/422/485 serial ports
- ▶ Two USB 2.0 ports
- ▶ Two SATA ports to P16
- ▶ NXP hypervisor support for secure partitioning
- ▶ Linux BSP
- ▶ Wind River VxWorks BSP
- ▶ QNX Neutrino BSP
- ▶ Green Hills INTEGRITY BSP
- ▶ LynuxWorks LynxOS BSP

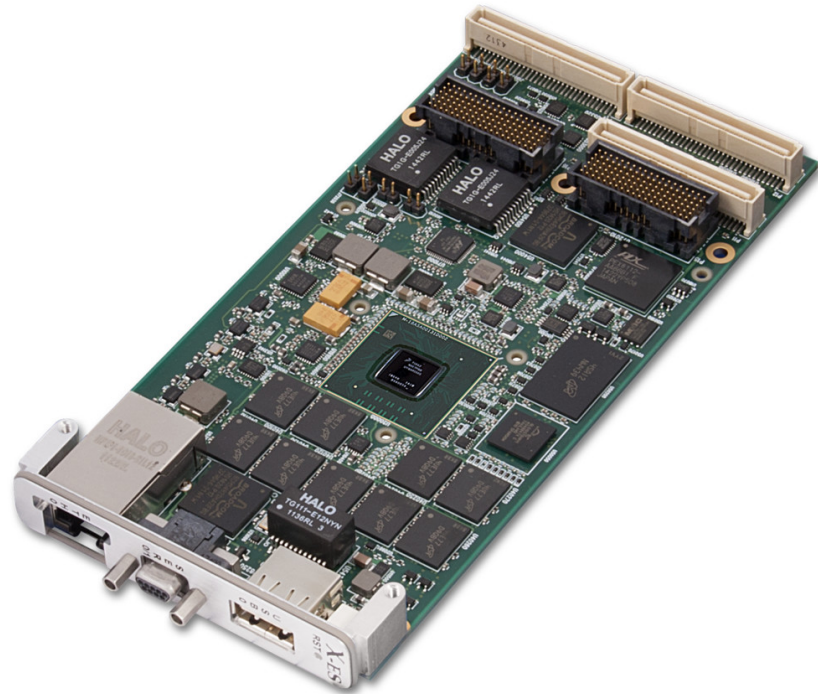

XPedite6100

The XPedite6100 is a high-performance, XMC/PrPMC, single board computer supporting an NXP (formerly Freescale) QorIQ T1042 processor.

The T1042 processor offers four e5500 cores running at up to 1.4 GHz with a single channel of DDR3-1600 memory, all within a low power envelope. Alternate processors T1022 and T2081 are available.

The XPedite6100 provides a high-performance, feature-rich solution for current and future generations of embedded applications. Linux, Wind River VxWorks, QNX Neutrino, Green Hills INTEGRITY, and LynuxWorks LynxOS Board Support Packages (BSPs) are available. Wind River VxWorks and Linux BSPs may optionally be paired with the NXP hypervisor software to facilitate secure partitioning.

X-ES

Extreme Engineering Solutions

...Always Fast

Extreme Engineering Solutions

9901 Silicon Prairie Parkway • Verona, WI 53593
 Phone: 608.833.1155 • Fax: 608.827.6171
 sales@xes-inc.com • <https://www.xes-inc.com>

Processor

- NXP (formerly Freescale) QorIQ T1042 processor with four Power Architecture® e5500 cores at up to 1.4 GHz
- 256 kB back-side L2 cache (per core)
- 256 kB platform cache
- IEEE 754 Floating-Point Unit support

Alternate Processor Configurations

- T1022 (two e5500 cores) at up to 1.4 GHz
- T2081 (four dual-threaded e6500 cores) at up to 1.8 GHz

Memory

- Up to 8 GB of up to DDR3-1600 ECC SDRAM
- Up to 512 MB of NOR flash (with redundancy)
- Up to 32 GB of NAND flash

PrPMC Interface

- 66/33 MHz PCI
- 32-bit bus interface

P15 XMC Interface

- x4 PCI Express Gen2 (T10xx) or Gen3 (T2081)

P14/P16 XMC/PMC Interface

- Two 10/100/1000BASE-T Ethernet ports to P14
- One 10/100/1000BASE-T Ethernet port to P16
- Two RS-232/422/485 serial ports
- 3.3 V GPIO
- Up to two USB 2.0 ports
- Two SATA ports capable of 6 Gb/s

Front Panel I/O

- One Gigabit Ethernet port
- Two RS-232 serial ports
- One USB 2.0 port

Software Support

- Wind River VxWorks BSP with optional NXP hypervisor support for secure partitioning
- Linux BSP with optional NXP hypervisor support for secure partitioning
- Green Hills INTEGRITY-178 BSP
- Contact factory for availability of QNX Neutrino and LynuxWorks LynxOS BSPs

Physical Characteristics

- Air-cooled XMC/PMC form factor
- Dimensions: 149 mm x 74 mm, 10 mm stacking height

Environmental Requirements

Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1, 3
- Conformal coating available as an ordering option

Power Requirements

- Power will vary based on configuration and usage. Please consult factory.

| Ruggedization Level | Level 1 | Level 3 | Level 5 |
|-----------------------|--|---|--|
| Cooling Method | Standard Air-Cooled | Rugged Air-Cooled | Conduction-Cooled |
| Operating Temperature | 0 to +55°C ambient (300 LFM) | -40 to +70°C (600 LFM) | -40 to +85°C (board rail surface) |
| Storage Temperature | -40 to +85°C ambient | -55 to +105°C ambient | -55 to +105°C (maximum) |
| Vibration | 0.002 g ² /Hz (maximum), 5 to 2000 Hz | 0.04 g ² /Hz (maximum), 5 to 2000 Hz | 0.1 g ² /Hz (maximum), 5 to 2000 Hz |
| Shock | 20 g, 11 ms sawtooth | 30 g, 11 ms sawtooth | 40 g, 11 ms sawtooth |
| Humidity | 0% to 95% non-condensing | 0% to 95% non-condensing | 0% to 95% non-condensing |

